



THE ESSENTIALS

**USA CONTRACTOR BOOKLET
OCTOBER, 2024**

TABLE OF CONTENTS

AMIR – MIRAGE	4	SSFP	32
CONVECTOR		SELF-REGULATING FREEZE PROTECTION PREASSEMBLED CABLE	
ABA – BELLA	6	SCRG	33
HIGH-END ALUMINIUM BASEBOARD		CONSTANT WATTAGE ROOF AND GUTTER DE-ICING HEATING CABLE	
ASPR – PRIMA	8	MUAA	34
HIGH-END BASEBOARD		MAKE-UP AIR UNIT	
AB – BRAVA	10	SDHx, SDHxT	35
ELECTRIC BASEBOARD		CUSTOM DUCT HEATERS	
ASOA – OASIS	12	ELN – EL-NIÑO	36
WALL FAN HEATER		HAND DRYER	
ASSOS – SONOMA STYLE	14	ST302P, ST402P	38
WALL FAN HEATER		PROGRAMMABLE ELECTRONIC THERMOSTATS FOR BASEBOARDS AND CONVECTORS	
ASSOH – SONOMA HORIZON	15	ST252NP, ST302NP, ST402NP	38
WALL FAN HEATER		NON-PROGRAMMABLE ELECTRONIC THERMOSTATS FOR BASEBOARDS AND CONVECTORS	
ASSO – SONOMA	16	ST402PFF	39
WALL FAN HEATER		PROGRAMMABLE ELECTRONIC THERMOSTAT FOR FAN HEATERS	
ARWF – PULSAIR	18	ST252NPFF, ST402NPFF	39
WALL FAN HEATER		NON-PROGRAMMABLE ELECTRONIC THERMOSTAT FOR FAN HEATERS	
AWF	19	STZW402 – KI Z-WAVE	40
WALL FAN HEATER		ELECTRONIC THERMOSTAT FOR SMART HOME	
ASK	20	STF362WF – CONCERTO WI-FI	41
CEILING FAN HEATER		FLOOR HEATING THERMOSTAT – CONNECTED	
ASKS	21	STF362PTS – CONCERTO TOUCH	42
KICK SPACE HEATER		FLOOR HEATING THERMOSTAT – TOUCH SCREEN	
SCR – RADIANCE	22	STF362P – CONCERTO PROGRAMMABLE	42
COVE HEATER		FLOOR HEATING THERMOSTAT – PROGRAMMABLE	
ASIRH – ZENITH	23	STF362P – CONCERTO BASIC	43
INFRARED RADIANT HEATER		FLOOR HEATING THERMOSTAT – NON-PROGRAMMABLE	
ASHU – OXFORD	24	COMPATIBILITY OF THERMOSTATS AND RELAYS	44
COMMERCIAL AND INDUSTRIAL UNIT HEATER		LET YOURSELF BE INSPIRED	45
ARUH – OXFORD	25	SERIES COMPARISON CHART	46
COMMERCIAL AND RESIDENTIAL UNIT HEATER			
ASGH – SPIDER	26		
CEILING FAN HEATER			
ASCH	27		
PORTABLE MULTIPURPOSE HEATER			
HGS – GREEN CABLE SURFACE XL	28		
FLOOR HEATING CABLE			
SSFR	30		
SELF-REGULATING FREEZE PROTECTION CABLE REEL			

AMIR – MIRAGE™

CONVECTOR

5 YEAR
WARRANTY



- **BLENDS IN WITH ANY DECOR**
- **STURDY ONE-PIECE FRONT PANEL**
- **TOTALLY QUIET**
- **BUILT-IN ELECTRONIC THERMOSTAT (OPTIONAL)**
WITH BACKLIT SCREEN

COLORS

- standard: white
- Orora (optional): refer to p.45

FINISH

- epoxy-polyester powdercoat

MANUFACTURING

- 20-gauge steel cabinet and front
- the cabinet height improves the chimney effect
- bottom air intake and top air discharge

ELEMENTS

- two stainless steel tubular sheathed elements insulated with nylon sleeves reducing expansion and contraction noises

CONTROL

(thermostats/relays compatibility: p.44)

- electronic thermostat required:
 - electronic wall thermostat (not included)
 - built-in electronic thermostat with LCD screen (optional)
- automatic temperature lowering at night (Automatic mode)
- maximum temperature setpoint lock option (Security mode)

INSTALLATION

- surface mounted only
- wall mounted at least 4 in. from the floor
- concealed mounting bracket (included)
- back entry plate with cable clamps (included)

WARRANTY

- five years, *three years on electronic components



BUILT-IN THERMOSTAT	PRICE	WITHOUT THERMOSTAT	PRICE	POWER	VOLTAGE	LENGTH	WEIGHT
CODE		CODE		WATTS (BTU/H)	VOLTS	IN.	LB
AMIR0501W	514.00	AMIR0501WCW	397.00	500 (1706)	120	17 1/2	11.75
AMIR0508W	514.00	AMIR0508WCW	397.00	500 (1706)	208	17 1/2	11.75
AMIR0502W	454.00	AMIR0502WCW	334.00	500/375 (1706/1280)	240/208	17 1/2	11.75
---	---	AMIR0507WCW	397.00	500 (1706)	277	17 1/2	11.75
AMIR1001W	547.00	AMIR1001WCW	430.00	1000 (3413)	120	23 1/2	14.75
AMIR1008W	547.00	AMIR1008WCW	430.00	1000 (3413)	208	23 1/2	14.75
AMIR1002W	483.00	AMIR1002WCW	367.00	1000/750 (3413/2560)	240/208	23 1/2	14.75
---	---	AMIR1007WCW	430.00	1000 (3413)	277	23 1/2	14.75
---	---	AMIR1005WCW	554.00	1000 (3413)	480	23 1/2	14.75
AMIR1501W	579.00	AMIR1501WCW	458.00	1500 (5119)	120	29 1/2	17.75
AMIR1508W	579.00	AMIR1508WCW	458.00	1500 (5119)	208	29 1/2	17.75
AMIR1502W	514.00	AMIR1502WCW	397.00	1500/1125 (5119/3839)	240/208	29 1/2	17.75
---	---	AMIR1507WCW	458.00	1500 (5119)	277	29 1/2	17.75
---	---	AMIR1505WCW	589.00	1500 (5119)	480	29 1/2	17.75
AMIR2008W	612.00	AMIR2008WCW	491.00	2000 (6825)	208	35 1/2	20.75
AMIR2002W	547.00	AMIR2002WCW	430.00	2000/1500 (6825/5119)	240/208	35 1/2	20.75
---	---	AMIR2007WCW	491.00	2000 (6825)	277	35 1/2	20.75
---	---	AMIR2005WCW	617.00	2000 (6825)	480	35 1/2	20.75

Consult the optional color chart and contact your Stelpro representative for all other colors.
 --- not available Dimensions: 18 in. high

ABA – BELLA™

HIGH-END ALUMINIUM BASEBOARD

5 YEAR
WARRANTY



- **CLEAN AND HIGH-END FINISH**
- **EXTREMELY SOLID, IMPACT AND RUST RESISTANT**
MADE OF EXTRUDED ALUMINUM
- **FIT FOR RESIDENTIAL AND COMMERCIAL ENVIRONMENTS**
- **TOTALLY QUIET**

COLORS

- standard: white
- Orora (optional): refer to p.45

FINISH

- epoxy-polyester powdercoat

MANUFACTURING

- 22-gauge steel cabinet
- 11-gauge equivalent extruded aluminum with molded and curved end-caps
- discreet air inlet: air enters through the front of the unit and exits from the top
- thermal protection with automatic reset
- full-length wireway

ELEMENT

- single tubular, stainless steel sheathed element with boxed aluminum fins for improved heat dissipation; the element is securely fastened at its centre, floating in nylon sleeves at each end, eliminating expansion and contraction noises

CONTROL

(thermostats/relays compatibility: p.44)

- wall thermostat (not included) – the use of an electronic thermostat is strongly recommended
- built-in mechanical single pole or double pole thermostat, installed in the left or right junction box (optional)
- low voltage relay kit installed in the left or right junction box (optional)
- disconnect switch (optional)

INSTALLATION

- surface mounted
- wiring compartment at both ends of unit

WARRANTY

- five years, *lifetime warranty on the heating element (for original owner)



DENSITY OF 250 W PER LINEAR FOOT – FOR COMMERCIAL USE ONLY						
120 V	208 V	240 /208 V [†]	POWER	WALL LENGTH [†]	WEIGHT	PRICE
CODE	CODE	CODE	WATTS (BTU/H)	IN.	LB	
ABA03019W	ABA03089W	ABA03029W	300 (1024)	20 13/16	5.1	277.00
ABA0501W	ABA0508W	ABA0502W	500 (1706)	28 13/16	6.5	282.00
ABA0751W	ABA0758W	ABA0752W	750 (2560)	38 1/2	8.0	324.00
ABA1001W	ABA1008W	ABA1002W	1000 (3413)	48 3/8	9.7	379.00
ABA1251W	ABA1258W	ABA1252W	1250 (4266)	58 3/16	11.4	455.00
ABA1501W	ABA1508W	ABA1502W	1500 (5119)	67 3/16	13.2	483.00
---	ABA1758W	ABA1752W	1750 (5972)	76 7/8	15.0	538.00
---	ABA2008W	ABA2002W	2000 (6825)	84 13/16	16.9	590.00
---	ABA2258W	ABA2252W	2250 (7679)	94 11/16	18.8	652.00
---	ABA2508W	ABA2502W	2500 (8532)	103 1/2	20.7	697.00

Consult the optional colors chart or contact your Stelpro representative for all other colors.
^{*} Power indicated is for 240 V only. 277 V, 480 V and density of 150 W per linear foot available upon request.
[†] Add 1/2 in. for total length. --- not available

ASPR – PRIMA™

HIGH-END BASEBOARD



- **SAFER HOUSING** – 1/4 IN. (6 MM) OPENINGS BLOCK ACCESS TO ELEMENTS
- **IMPACT RESISTANT** – REINFORCED FRONT PANEL
- **FAST AND EASY INSTALLATION**
GUIDE MARKS TO FACILITATE MOUNTING TO WALL
- **EASY TO CLEAN** – TWO-CLICK REMOVABLE FRONT PANEL

COLORS

- standard: white
- Orora (optional): refer to p.45

FINISH

- epoxy-polyester powdercoat

MANUFACTURING

- 22-gauge annealed galvanized steel housing and 20-gauge one-piece front panel that can support 99.8 kg (220 lbs) at the centre
- full-length thermal protection with automatic reset
- discreet air inlet; air exits from the top for maximum air circulation
- full-length wireway

ELEMENT

- single tubular, stainless steel sheathed element with boxed aluminum fins for improved heat dissipation; the element is securely fastened at its centre, floating in nylon sleeves at each end, eliminating expansion and contraction noises during heat cycles

CONTROL

- wall thermostat (not included) – use of a Stelpro electronic thermostat is strongly recommended
- built-in single pole electronic thermostat that can be installed in the right or left junction box (optional)
- low voltage relay kit and disconnect switch (optional)

INSTALLATION

- surface mounted
- connection compartment at each end
- BX and clamp knockouts for the NMD cables located at each end, at the back and under the unit
- oblong mounting holes at 1-inch intervals (top and bottom) and marks every 8 inches to locate studs

WARRANTY

- five years, *three years on electronic components and lifetime warranty on heating element (for original owner)

WATTS	TOTAL LENGTH	LENGTH ON WALL	WEIGHT
375 W	22 1/4	21 7/8	5.7
500 W / 750 W	36 1/16	35 11/16	7.7
1000 W / 1250 W	49 7/8	49 1/2	9.7
1500 W / 1750 W	63 11/16	63 5/16	11.7

FOR RESIDENTIAL USE					
275 W DENSITY PER LINEAR FOOT*		225 W DENSITY PER LINEAR FOOT*		VOLTAGE	PRICE
CODE	WATTS (BTU/H)	CODE	WATTS (BTU/H)	VOLTS	
ASPRM0371W	375 (1280)	---	---	120	169.00
ASPRM0378W	375 (1280)	---	---	208	169.00
ASPRM0372W	375 (1280) [†]	---	---	240/208	169.00
ASPRM0751W	750 (2560)	ASPRL0501W	500 (1706)	120	206.00
ASPRM0758W	750 (2560)	ASPRL0508W	500 (1706)	208	206.00
ASPRM0752W	750 (2560) [†]	ASPRL0502W	500 (1706) [†]	240/208	206.00
ASPRM0757W	750 (2560) ^{††}	ASPRL0507W	500 (1706) ^{††}	277/240/208	206.00
ASPRM1251W	1250 (4266)	ASPRL1001W	1000 (3413)	120	258.00
ASPRM1258W	1250 (4266)	ASPRL1008W	1000 (3413)	208	258.00
ASPRM1252W	1250 (4266) [†]	ASPRL1002W	1000 (3413) [†]	240/208	258.00
ASPRM1257W	1250 (4266) ^{††}	ASPRL1007W	1000 (3413) ^{††}	277/240/208	258.00
---	---	ASPRL1501W	1500 (5119)	120	334.00
ASPRM1758W	1750 (5972)	ASPRL1508W	1500 (5119)	208	334.00
ASPRM1752W	1750 (5972) [†]	ASPRL1502W	1500 (5119) [†]	240/208	334.00
ASPRM1757W	1750 (5972) ^{††}	ASPRL1507W	1500 (5119) ^{††}	277/240/208	334.00

Consult the optional colors chart or contact your Stelpro representative for all other colors.

*Densities are averages. †Power indicated is for 240 V only. †† Power indicated is for 277 V only. --- not available

ACCESSORIES

PRODUCT	DESCRIPTION	PRICE
SIBTE12F	built-in electronic thermostat – Fahrenheit [120 V-240 V]	115.00
SIBTE13F	built-in electronic thermostat – Fahrenheit [277 V-347 V]	154.00
SPRRE153*	built-in electronic low voltage relay [15 A @ 120 V-347 V]	142.00
SPRRE153T*	built-in electronic low voltage relay with 24 V transformer [15 A @ 208 V-347 V]	218.00
SPRRM120T*	built-in electromechanical relay with 24 V transformer [6000 W @ 120 V]	241.00
SPRRM240T*	built-in electromechanical relay with 24 V transformer [6000 W @ 240 V and 5200 W @ 208 V]	231.00
SPRRM347T*	built-in electromechanical relay with 24 V transformer [6000 W @ 347 V]	259.00
SPRRM347C*	built-in electromechanical relay without 24 V transformer [6000 W @ 120 V-347 V]	198.00
SPRDIS600*	disconnect switch [120V -600V] 30A	107.00

Electronic relays can receive a PWM (pulsed width modulation) or all-or-nothing (on/off) signal.

*Factory installation only



AB – BRAVA™

ELECTRIC BASEBOARD

5 YEAR
WARRANTY



- **ROUNDED CORNERS**
- **QUICK AND EASY INSTALLATION**
- **STRONG CABINET** – ONE-PIECE CONSTRUCTION
- **MAY BE CONTROLLED BY A BUILT-IN OR WALL THERMOSTAT**
(NOT INCLUDED)

COLORS

- standard: white
- Orora (optional): refer to p.45

FINISH

- epoxy-polyester powdercoat

MANUFACTURING

- 22-gauge steel casing able to support 165 lb (75 kg) at its centre
- full-length thermal protection with automatic reset
- cabinet designed to ensure optimal hot air distribution
- full-length wireway

ELEMENT

- single tubular, stainless steel sheathed element with boxed aluminum fins for improved heat dissipation; the element is securely fastened at its centre, floating in nylon sleeves at each end, eliminating expansion and contraction noises

CONTROL

- built-in thermostat installed in the left or right junction box (optional)
- single pole electronic thermostat installed in the left or right junction box (optional)
- wall thermostat (not included) – the use of an electronic thermostat is strongly recommended
- low voltage relay kit installed in the left junction box only (optional)


INSTALLATION

- surface mounted
- knockouts for the BX and clamps for the NMD cables located at each end
- mounting holes spaced at 1-inch intervals along the top and the bottom of the unit

WARRANTY

- five years, *three years on electronic components and lifetime warranty on heating element (for original owner)

BUILT-IN THERMOSTAT



SIBTE - ELECTRONIC



SIBTx - MECHANICAL

DENSITY OF 250 W PER LINEAR FOOT							
120 V	208 V	240/208 V*	277/240/208V**	POWER	LENGTH	WEIGHT	PRICE
CODE	CODE	CODE	CODE	WATTS (BTU/H)	IN.	LB	
AB03019W	AB03089W	AB03029W	---	300 (1024)	19 7/8	5	89.00
AB0501W	AB0508W	AB0502W	AB0507W	500 (1706)	27 7/8	7	92.00
AB0751W	AB0758W	AB0752W	AB0757W	750 (2560)	37 5/8	9	108.00
AB41001W	AB41008W	AB41002W	AB41007W	1000 (3413)	48	11	119.00
AB51251W	AB51258W	AB51252W	AB51257W	1250 (4266)	60	14	143.00
AB61501W	AB61508W	AB61502W	AB61507W	1500 (5119)	72	16	163.00
---	AB1758W	AB1752W	AB1757W	1750 (5972)	76	18	176.00
---	AB82008W	AB82002W	AB82007W	2000 (6825)	96	20	179.00
---	AB82258W	AB82252W	AB82257W	2250 (7679)	96	22	187.00
---	AB2508W	AB2502W	AB2507W	2500 (8532)	102 5/8	24	200.00

Consult the optional colors chart or contact your Stelpro representative for all other colors.

* Power indicated is for 240 V only. ** Power indicated is for 277 V only.

Add HA for the high altitude version

Please note that the width of the units may vary by more or less 1/16 in. 480 V available upon request

ACCESSORIES

PRODUCT	DESCRIPTION	PRICE
SIBTE12F	built-in electronic thermostat – Fahrenheit [120 V-240 V]	115.00
SIBTE13F	built-in electronic thermostat – Fahrenheit [277 V-347 V]	154.00
SIBT1W	built-in single pole thermostat [120 V-600 V]	52.00
SIBT2W	built-in double pole thermostat [120 V-600 V]	61.00
SIBT2TPW	built-in tamper-proof double pole thermostat [120 V-600 V]	89.00
BRE153*	built-in electronic low voltage relay [15 A @ 120 V-347 V]	136.00
BRE156*	built-in electronic low voltage relay [6 A @ 600 V]	220.00
BRE153T*	built-in electronic low voltage relay c/w transformer 24 V [15 A @ 208 V-347 V]	215.00
BDIS277*	disconnect switch [20 A @ 120 V-277 V]	93.00
BPW	white spray paint	88.00

Electronic relays can receive a PWM (pulsed width modulation) or digital (on/off) signal.

* Factory installation only



ASOA – OASIS™

WALL FAN HEATER

5 YEAR
WARRANTY



- **ULTRA-QUIET FAN HEATER**
- **HEAT "BOOST" MODE**
FAST TEMPERATURE INCREASE (1000 W TO 2000 W)†
- **FEATURING HIGH-PERFORMANCE POLYMER AND SATIN-FINISH PAINTED STEEL**
- **OPTIONAL BUILT-IN ELECTRONIC THERMOSTAT**

COLOR

- white

FINISH

- epoxy-polyester powdercoat

MANUFACTURING

- high performance polymer cabinet and front edges, 20-gauge satin-finish steel front
- centrifugal fan that ensures a quiet and efficient airflow
- thermal protections with manual reset
- top front air intake and bottom front air discharge
- 6 ft 16 gage molded cable with 3-prong grounded, 120 V plug (ASOA1501PW model)

ELEMENT

- high-quality nichrome element that generates instant heat

CONTROL

(thermostats/relays compatibility: p.44)

MODEL WITHOUT A THERMOSTAT:

- an electronic wall thermostat is recommended

MODEL WITH A BUILT-IN THERMOSTAT:

- built-in electronic thermostat
- 1000 W to maintain temperature setpoint
- 2000 W when "boost" mode is activated (with a timer)
- drastic temperature drop detection (open window function)

INSTALLATION

- recessed or surface mounted – surface adapter not required
- on the wall, a minimum of 6 in. from the floor
- front easy to install with only one mounting screw
- power switch selector – 1000 W or 2000 W (model without a thermostat only)

WARRANTY

- five years, *three years on electronic components

† 9°F temperature rise within five minutes. (Tests performed with the 2000 W model in a 70 ft² room.)



PRODUCT	WITH THERMOSTAT		WITHOUT THERMOSTAT	VOLTAGE	PRICE
	HEATING	HEAT "BOOST" MODE			
CODE	WATTS (BTU/H)	WATTS (BTU/H)	WATTS	VOLTS	
ASOA1501W	1000 (3413)	1500 (5119)	---	120	577.00
ASOA1501WCW	---	---	1000 (3413)	120	451.00
ASOA2002W	1000/750 (3413/2560)	2000/1500 (6825/5119)	---	240/208	577.00
ASOA2002WCW	---	---	2000/1500 or 1000/750 (6825/5119 or 3413/2560)**	240/208	451.00
MODEL WITH 120 V PLUG (RESIDENTIAL OUTLET)					
ASOA1501PW	1000 (3413)	1500 (5119)	---	120	641.00

** Selected when installed with a power switch.
 Dimensions: 12 in. wide x 15 13/16 high. Weight: 7.9 lb

ASSOS[†] – SONOMA™ STYLE

WALL FAN HEATER

5 YEAR WARRANTY



- INNOVATIVE AND UNIQUE DESIGN
- INTEGRATED ELECTRONIC THERMOSTAT AVAILABLE
- COMPACT – FIT ANYWHERE, PERFECT FOR SMALL SPACES
- QUICK AND EASY INSTALLATION
EASILY RETROFITS MOST POPULAR MODELS
- RAPID TEMPERATURE RISE

COLOR

- white

FINISH

- epoxy-polyester powdercoat

MANUFACTURING

- 22-gauge steel cabinet and 20-gauge steel facade
- thermal protection with manual reset
- additional one-time thermal fuse

ELEMENT

- nichrome element produces instant heat

CONTROL

(thermostats/relays compatibility: p.44)

- built-in electronic thermostat (optional)
- wall thermostat (not included) – the use of an electronic thermostat is strongly recommended

INSTALLATION

- recessed
- wall mounted with surface adapter (optional, see p.16)

WARRANTY

- five years, *three years on electronic components

PRODUCT	POWER		VOLTAGE	PRICE
CODE	WATTS*	BTU/H	VOLTS	
WITHOUT CONTROL				
ASSOS1001WCW	1000 or 500	3413 or 1706	120	345.00
ASSOS1008WCW	1000 or 500	3413 or 1706	208	345.00
ASSOS1002WCW	1000/750 or 500/375	3413/2560 or 1706/1280	240/208	345.00
ASSOS1501WCW	1500 or 750	5119 or 2560	120	345.00
ASSOS1508WCW	1500 or 750	5119 or 2560	208	345.00
ASSOS1502WCW	1500/1125 or 750/560	5119/3839 or 2560/1911	240/208	345.00
BUILT-IN ELECTRONIC THERMOSTAT				
ASSOS1001W	1000	3413	120	470.00
ASSOS1008W	1000	3413	208	470.00
ASSOS1002W	1000/750	3413/2560	240/208	470.00
ASSOS1501W	1500	5119	120	470.00
ASSOS1508W	1500	5119	208	470.00
ASSOS1502W	1500/1125	5119/ 3839	240/208	470.00

Add WBB for unit without back box (available for U.S. market only).

*Choice of power at installation for models without control only

ASSOH – SONOMA™ HORIZON

WALL FAN HEATER

5 YEAR WARRANTY



- **CAN BE INSTALLED HIGH UP**
OUT OF THE REACH OF CHILDREN AND PETS
- **COMPACT** – FIT ANYWHERE, PERFECT FOR SMALL SPACES
- **OPTIMAL SAFETY**
INTEGRATED THERMAL CUTOFF AND RESISTANT FACADE
- **RAPID TEMPERATURE RISE**

COLOR

- white

FINISH

- epoxy-polyester powdercoat

MANUFACTURING

- 22-gauge steel cabinet and 20-gauge steel grille
- thermal protections with manual reset
- additional one-time thermal fuse

ELEMENT

- nichrome element produces instant heat

CONTROL

(thermostats/relays compatibility: p.44)

- built-in thermostat (optional)
- wall thermostat (not included) – the use of an electronic thermostat is strongly recommended

INSTALLATION

- recessed only
- bottom of the wall: 6 in. min. from floor
- top to the wall: 6 in. min. from ceiling

WARRANTY

- five years

PRODUCT	POWER		VOLTAGE	PRICE
CODE	WATTS*	BTU/H	VOLTS	
WITHOUT CONTROL				
ASSOH1001WCW	1000 OR 500	3413 OR 1706	120	300.00
ASSOH1008WCW	1000 OR 500	3413 OR 1706	208	300.00
ASSOH1002WCW	1000/750 OR 500/375	3413/2560 OR 1706/1280	240/208	300.00
ASSOH1501WCW	1500 OR 750	5119 OR 2560	120	300.00
ASSOH1502WCW	1500/1125 OR 750/560	5119/3839 OR 2560/1911	240/208	300.00
ASSOH2008WCW	2000 OR 1000	6825 OR 3413	208	300.00
ASSOH2002WCW	2000/1500 OR 1000/750	6825/5119 OR 3413/2560	240/208	300.00
BUILT-IN ELECTRONIC THERMOSTAT				
ASSOH1001T2W	1000 OR 500	3413 OR 1706	120	350.00
ASSOH1008T2W	1000 OR 500	3413 OR 1706	208	350.00
ASSOH1002T2W	1000/750 OR 500/375	3413/2560 OR 1706/1280	240/208	350.00
ASSOH1501T2W	1500 OR 750	5119 OR 2560	120	350.00
ASSOH1502T2W	1500/1125 OR 750/560	5119/3839 OR 2560/1911	240/208	350.00
ASSOH2008T2W	2000 OR 1000	6825 OR 3413	208	350.00
ASSOH2002T2W	2000/1500 OR 1000/750	6825/5119 OR 3413/2560	240/208	350.00

Add WBB for unit without back box (available for U.S. market only).

*Choice of power at installation for models without control only

ASSO – SONOMA™

WALL FAN HEATER

5 YEAR
WARRANTY



- **RESISTANT FACADE WITH REFINED DESIGN**
- **DESIGNED WITH THE USER EXPERIENCE IN MIND**
CONTROLS LOCATED AT THE TOP OF THE UNIT
- **COMPACT** – FIT ANYWHERE, PERFECT FOR SMALL SPACES
- **QUICK AND EASY INSTALLATION**
EASILY RETROFITS MOST POPULAR MODELS
- **RAPID TEMPERATURE RISE**

COLOR

- white

FINISH

- epoxy-polyester powdercoat

MANUFACTURING

- 22-gauge steel cabinet and 20-gauge steel grille
- thermal protections with manual reset
- additional one-time thermal fuse

ELEMENT

- nichrome element produces instant heat

CONTROL

(thermostats/relays compatibility: p.44)

- built-in thermostat (optional)
- built-in timer (optional)
- wall thermostat (not included) – the use of an electronic thermostat is strongly recommended

INSTALLATION

- recessed
- wall mounted with surface adapter (optional)

WARRANTY

- five years

ACCESSORIES

PRODUCT	DESCRIPTION	PRICE
ASSOBB6	back box (6)	190.00
ASSOT1W	built-in single pole thermostat [120 V-347 V]	38.00
ASSOT2W	built-in double pole thermostat [120V-347V]	50.00
ASSOSAW	surface adapter (white)	124.00



PRODUCT	POWER*		VOLTAGE	PRICE
CODE	WATTS*	BTU/H	VOLTS	
WITHOUT CONTROL				
ASSO1001WCW	1000 or 500	3413 or 1706	120	220.00
ASSO1008WCW	1000 or 500	3413 or 1706	208	220.00
ASSO1002WCW	1000/750 or 500/375	3413/2560 or 1706/1280	240/208	220.00
ASSO1501WCW	1500 or 750	5119 or 2560	120	220.00
ASSO1502WCW	1500/1125 or 750/560	5119/3839 or 2560/1911	240/208	220.00
ASSO2008WCW	2000 or 1000	6825 or 3413	208	220.00
ASSO2002WCW	2000/1500 or 1000/750	6825/5119 or 3413/2560	240/208	220.00
BUILT-IN ELECTRONIC THERMOSTAT				
ASSO1001T2W	1000 or 500	3413 or 1706	120	256.00
ASSO1008T2W	1000 or 500	3413 or 1706	208	256.00
ASSO1002T2W	1000/750 or 500/375	3413/2560 or 1706/1280	240/208	256.00
ASSO1501T2W	1500 or 750	5119 or 2560	120	256.00
ASSO1502T2W	1500/1125 or 750/560	5119/3839 or 2560/1911	240/208	256.00
ASSO2008T2W	2000 or 1000	6825 or 3413	208	256.00
ASSO2002T2W	2000/1500 or 1000/750	6825/5119 or 3413/2560	240/208	256.00
BUILT-IN THERMOSTAT AND TIMER				
ASSO1001T2TW	1000 or 500	3413 or 1706	120	340.00
ASSO1008T2TW	1000 or 500	3413 or 1706	208	340.00
ASSO1002T2TW	1000/750 or 500/375	3413/2560 or 1706/1280	240/208	340.00
ASSO1501T2TW	1500 or 750	5119 or 2560	120	340.00
ASSO1502T2TW	1500/1125 or 750/560	5119/3839 or 2560/1911	240/208	340.00
ASSO2008T2TW	2000 or 1000	6825 or 3413	208	340.00
ASSO2002T2TW	2000/1500 or 1000/750	6825/5119 or 3413/2560	240/208	340.00

Add WBB for unit without back box (available for U.S. market only).

*Choice of power at installation for models without control only

ARWF – PULSAIR™

WALL FAN HEATER

5 YEAR
WARRANTY



- **VERY QUIET FAN HEATER**
- **RESISTANT GRILLE**
- **INSTANT HEAT – NICHROME ELEMENT**
- **MULTIPLE INSTALLATION OPTIONS**
RECESSED, SURFACE MOUNTED, HORIZONTAL OR VERTICAL

COLORS

- standard: white
- Orora (optional): refer to p.45

FINISH

- epoxy-polyester powdercoat

MANUFACTURING

- 20-gauge steel cabinet and 18-gauge steel grille
- quiet fan:
 - 40 CFM (500 W to 1000 W models)
 - 75 CFM (1250 W to 2000 W models)
- thermal protection with automatic reset
- dual wattage (DW) in some models (see DW in technical specifications table)
- additional thermal protection with a thermal fuse (must be replaced if triggered)
- pilot light indicates when thermal protection has been activated

ELEMENT

- nichrome element produces instant heat

CONTROL

(thermostats/relays compatibility: p.44)

- built-in thermostat (optional)
- wall thermostat (not included) – the use of an electronic thermostat is strongly recommended

INSTALLATION

- wall mounted
- recessed (wall must have a depth of 2 3/8 in. minimum)
- surface mounted with surface adapter (optional)
- four installation positions

WARRANTY

- five years

WITHOUT CONTROL		BUILT-IN SINGLE POLE THERMOSTAT		BUILT-IN DOUBLE POLE THERMOSTAT		POWER*	VOLTAGE	FLOW
CODE	PRICE	CODE	PRICE	CODE	PRICE	WATTS (BTU/H)	VOLTS	CFM
ARWF1001W	255.00	ARWF1001TW	295.00	ARWF1001T2W	295.00	1000/500 (3413/1706)	120	40
ARWF1008W	255.00	ARWF1008TW	295.00	ARWF1008T2W	295.00	1000/500 (3413/1706)	208	40
ARWF1002W	255.00	ARWF1002TW	295.00	ARWF1002T2W	295.00	1000/500 (3413/1706)	240	40
ARWF1501W	255.00	ARWF1501TW	295.00	ARWF1501T2W	295.00	1500/750 (5119/2560)	120	75
ARWF1508W	255.00	ARWF1508TW	295.00	ARWF1508T2W	295.00	1500/750 (5119/2560)	208	75
ARWF1502W	255.00	ARWF1502TW	295.00	ARWF1502T2W	295.00	1500/750 (5119/2560)	240	75
ARWF2008W	255.00	ARWF2008TW	295.00	ARWF2008T2W	295.00	2000/1000 (6825/3413)	208	75
ARWF2002W	255.00	ARWF2002TW	295.00	ARWF2002T2W	295.00	2000/1000 (6825/3413)	240	75

Consult the optional colors chart or contact your Stelpro representative for all other colors. Weight: 6 lb

--- not available * dual wattage

AWF

WALL FAN HEATER

3 YEAR
WARRANTY



- **GRILLE WITH ROUNDED SIDES**
- **WIDE RANGE OF MODELS AND HEATING CAPACITIES**
INCLUDING A SINGLE 4800 W MODEL
- **NICHROME ELEMENT** – ASSURING INSTANT HEAT
- **OPTIONAL DISCONNECT SWITCH AVAILABLE**

COLORS

- standard: white
- Orora (optional): refer to p.45

FINISH

- epoxy-polyester powdercoat

MANUFACTURING

- 20-gauge steel cabinet and 18-gauge steel grille
- top air intake with bottom air discharge
- quiet helicoidal fan:
 - single unit 1 x 160 CFM
 - double unit 2 x 160 CFM
 - triple unit 3 x 160 CFM
- thermal protection with automatic reset
- closed and permanently lubricated motor

ELEMENT

- high-quality nichrome element producing instant heat

CONTROL

- (thermostats/relays compatibility: p.44)
- connection of multiple units to the same thermostat is possible with a relay kit without transformer (optional) and an external transformer (not provided)

INSTALLATION

- wall mounted
- recessed or surface mounted with surface adapter (optional)

WARRANTY

- three years

208 V	240 V	277 V	POWER	WEIGHT	PRICE
			WATTS (BTU/H)	LB	
WITH THERMOSTAT					
AWF1508TW	AWF1502TW	AWF1507TW	1500 (5119)	20	640.00
AWF2008TW	AWF2002TW	AWF2007TW	2000 (6825)	20	640.00
AWF3008TW	AWF3002TW	AWF3007TW	3000 (10 238)	20	640.00
AWF4008TW	AWF4002TW	AWF4007TW	4000 (13 651)*	20	640.00
AWF4808TW	AWF4802TW	AWF4807TW	4800 (16 381)	20	723.00
WITHOUT THERMOSTAT					
AWF1508W	AWF1502W	AWF1507W	1500 (5119)	20	561.00
AWF2008W	AWF2002W	AWF2007W	2000 (6825)	20	561.00
AWF3008W	AWF3002W	AWF3007W	3000 (10 238)	20	561.00
AWF4008W	AWF4002W	AWF4007W	4000 (13 651)*	20	561.00
AWF4808W	AWF4802W	AWF4807W	4800 (16 381)	20	644.00

Consult the optional colors chart or contact your Stelpro representative for all other colors.

* Dual wattage (4000/2000 W – 13 651/6825 Btu/hr)

ASK

CEILING FAN HEATER

5

YEAR
WARRANTY





- **CEILING MOUNTED** – IDEAL FOR ROOMS WITH LIMITED WALL SPACE
- **HEATING ON DEMAND** – OPTIONAL WALL TIMER
- **COMPACT AND QUIET**

COLORS

- standard: white
- Orora (optional): refer to p.45

FINISH

- epoxy-polyester powdercoat

MANUFACTURING

- 22-gauge steel cabinet and 1/4 in. (6.4 mm) deep 20-gauge steel front grille
- easy access for maintenance (no screws)

THERMAL PROTECTION

- thermal protection with automatic reset

ELEMENT

- nichrome element produces instant heat

CONTROL

(thermostats/relays compatibility: p.44)

- built-in thermostat (optional)
- wall thermostat (not included) – the use of an electronic thermostat is strongly recommended
- 60 minute timer (optional)

INSTALLATION

- ceiling mounted (recommended height 8 ft, maximum 9 ft)
- surface mounted with surface adapter (optional)
- recessed or surface mounted with adapter for suspended ceiling (optional)
- unit can be mounted parallel or perpendicular to ceiling beams
- approved to be recessed in mineral wool; for all other materials please check with insulating product manufacturer

WARRANTY

- five years

120 V	208 V	240 /208 V*	POWER	FLOW	THROW DISTANCE	HEAT RISE	PRICE
CODE	CODE	CODE	WATTS (BTU/H)	CFM	FT	*F	
ASK0501W	ASK0508W	ASK0502W	500 (1706)	60	8	26	466.00
ASK0751W	ASK0758W	ASK0752W	750 (2560)	60	8	39	466.00
ASK1001W	ASK1008W	ASK1002W	1000 (3413)	60	8	53	494.00
ASK1251W	ASK1258W	ASK1252W	1250 (4266)	60	8	66	494.00
ASK1501W	ASK1508W	ASK1502W	1500 (5119)	60	8	79	545.00
---	---	ASK2002W	2000 (6825)	90	10'6"	70	618.00

Consult the optional colors chart or contact your Stelpro representative for all other colors.

* The power indicated applies to the 240 V only.

--- not available

Weight: 11 lb

ASKS

KICK SPACE HEATER

5 YEAR WARRANTY



- **POWER SELECTOR SWITCH**
- **EASY INSTALLATION**
- **ATTRACTIVE GRILLE – ONE-PIECE, FRAMELESS**

COLORS

- standard: white
- luxury finish: stainless steel
- Orora (optional): refer to p.45

FINISH

- epoxy-polyester powdercoat

MANUFACTURING

- 22-gauge steel cabinet and 16-gauge steel front
- quiet, 50 CFM capacity
- thermal protection with automatic reset
- added protection provided by a fuse-link (must be replaced once activated)

WATTAGE AND VOLTAGE

- power selector switch

ELEMENT

- tubular element sheathed with spiral-wound fins for improved heat dissipation

CONTROL

- (thermostats/relays compatibility: p.44)
- wall thermostat (not included) – the use of an electronic thermostat is strongly recommended
- built-in thermostat (optional)

INSTALLATION

- recessed

WARRANTY

- five years, *three years on electronic components

PRODUCT	POWER	VOLTAGE	THROW DISTANCE (IN FRONT)	HEAT RISE	PRICE	
CODE	WATTS (BTU/H)	VOLTS	FT	*F	W	SS
ASKS1001	500 or 1000 (1706 or 3413)	120	4	53	459.00	511.00
ASKS1002	500/375 or 1000/750 (1706/1280 or 3413/2560)	240/208	4	53	459.00	511.00

Add W for white or SS for stainless steel (consult the optional colours chart or contact your Stelpro representative for all other colours).

Weight: 10 lb

SCR – RADIANCE™

COVE HEATER

5 YEAR WARRANTY



- **15% GREATER ENERGY PERFORMANCE COMPARED TO OTHER RADIANT HEATERS**
- **WALL MOUNTED 2.5 IN. FROM THE CEILING**
OUT OF REACH OF CHILDREN AND FREES UP SPACE
- **IDEAL FOR PEOPLE WITH ALLERGIES**
NO FORCED-AIR MOVEMENT OR COMBUSTION

COLORS

- standard: soft white
- Orora (optional): anodized aluminum paint and black only (refer to p.45)

FINISH

- front panel: high temperature, high emissivity paint coating for maximum thermal efficiency
- other parts: hybrid epoxy-polyester powder paint

MANUFACTURING

- aluminum front panel
- 18-gauge steel cabinet and back box
- aluminum end covers
- 24-gauge stainless steel reflector
- full-length wireway
- designed and assembled for reduced noise from the expansion and contraction of metal during heating cycles

ELEMENT

- tubular; stainless steel

CONTROL

- (thermostats/relays compatibility: p.44)
- wall thermostat (not included) – the use of an electronic thermostat is strongly recommended
 - built-in single pole bimetal thermostat installed in the left or right junction box (optional)

INSTALLATION

- wall mounted at a distance of 2.5 in. or more from the ceiling
- all flammable material must be 6 in. or more from the front of the unit

WARRANTY

- five years

120 V	208 V	240 / 208 V†	277 V	POWER	LENGTH	WEIGHT	PRICE
CODE	CODE	CODE	CODE	WATTS (BTU/H)	IN.	LB	
SCR0451W	SCR0458W	SCR0452W	SCR0457W	450 (1536)	34	6.4	357.00
SCR0601W	SCR0608W	SCR0602W	SCR0607W	600 (2048)	47	8.9	394.00
SCR0751W	SCR0758W	SCR0752W	SCR0757W	750 (2560)	59	11.1	459.00
SCR0901W	SCR0908W	SCR0902W	SCR0907W	900 (3071)	71	13.0	506.00
SCR1051W	SCR1058W	SCR1052W	SCR1057W	1050 (3583)	83	15.7	549.00
SCR1201W	SCR1208W	SCR1202W	SCR1207W	1200 (4095)	94	17.8	623.00
---	SCR1508W	SCR1502W	SCR1507W	1500 (5119)	106	20.1	758.00

Consult the optional colors chart or contact your Stelpro representative for all other colors.

† The power indicated applies to the 240 V only.

--- not available

ASIRH – ZENITH™

INFRARED RADIANT HEATER

3 YEAR WARRANTY



- GENERATES INSTANT HEAT
- COMPACT, LIGHTWEIGHT, STURDY AND EASY TO INSTALL
- CLEAN ELECTRICAL ENERGY WITH NO AIR DISPLACEMENT
- WEATHER-RESISTANT MODELS AVAILABLE

COLOR

- black

FINISH

- super-resistant polyester powdercoat

MANUFACTURING

- 14-gauge aluminum housing
- stainless steel grille
- specialized embossed aluminum reflectors that optimize radiant efficiency and reduce glare
- standard mounting bracket (included)

LAMP

- quartz lamp with glare-reducing filter and tungsten filament produces short-wave infrared heat
- 80% radiant efficiency

CONTROL

- (thermostats/relays compatibility: p.44)
- electronic dimmer with timer (optional) (ASIRHC402-1 or independent switch*)

INSTALLATION

- on wall or ceiling with mounting bracket (included) or pole mounted (adaptor not provided), in accordance with clearances and installation heights as specified in the installation manual

WARRANTY

- three years

* The power feeding the units can be reduced using controls that meet the following requirements: the controls must be able to handle inductive and resistive loads. They must also have circuits to regulate the start-up current since this type of appliance generates a high start-up current.

PRODUCT		WEATHER-RESISTANT		POWER	VOLTAGE	HEIGHT	WEIGHT
CODE	PRICE	CODE	PRICE	WATTS (BTU/H)	VOLTS	IN.	LB
ASIRH1501W	897.00	ASIRH1501WR	1 031.00	1500 (5120)	120	10	11
ASIRH2002W	897.00	ASIRH2002WR	1 031.00	2000/1600 (6825/5460)	240/208	10	11
ASIRH4002W	1 108.00	ASIRH4002WR	1 246.00	4000/3200 (13 651/10 921)	240/208	15 7/8	13.8
ASIRH6002W	1 440.00	ASIRH6002WR	1 576.00	6000/4800 (20 476/16 381)	240/208	21 13/16	16.3

Frequency: 60 HZ. Dimensions: 5 5/8 in. (depth) x 19 in. (length).

ASHU – OXFORD™

COMMERCIAL AND INDUSTRIAL UNIT HEATER

3 YEAR
WARRANTY



- INSTANT HEAT
- PERMANENTLY LUBRICATED MOTOR
- WIDE RANGE OF POWER: 2 KW TO 60 KW

COLOR

- charcoal

FINISH

- epoxy-polyester powdercoat

MANUFACTURING

- heavy-duty, 18-gauge steel cabinet
- adjustable louvers and protective screen
- thermal protection with automatic reset

MOTOR

- permanently enclosed lubricated ball bearing motor for long-lasting operation

ELEMENT

- nichrome element produces instant heat

CONTROL

(thermostats/relays compatibility: p.44)

- connection of multiple units to the same thermostat is possible with a relay kit without transformer (optional) and an external transformer (not provided)
- built-in thermostat (included with T series)

INSTALLATION

- wall or ceiling mounted with universal mounting bracket (included). See web site for more details

WARRANTY

- three years

PRODUCT		FLOW	POWER	HEAT RISE	WEIGHT	PRICE
208 V	240 V	CFM	WATTS (BTU/H)	°F	LB	
ASHU0381CHAR	ASHU0321CHAR	250	3000 (10 238)	38	40	852.00
ASHU0481CHAR	ASHU0421CHAR	250	4000 (13 651)	50	40	862.00
---	ASHU0521CHAR	450	5000 (17 064)	35	40	1 061.00
ASHU0783CCHAR*	ASHU0721CCHAR	700	7500 (25 595)	34	40	1 620.00
ASHU1083CCHAR*	ASHU1021CCHAR	700	10 000 (34 127)	45	40	1 708.00
ASHU1583CCHAR*	ASHU1521CCHAR	1300	15 000 (51 191)	37	67	2 997.00
ASHU2083CCHAR*	ASHU2021CCHAR	1300	20 000 (68 254)	49	67	3 294.00
277 V	480 V-24 V	CFM	WATTS (BTU/H)	°F	LB	
ASHU0571CCHAR	ASHU0553C24CHAR*	450	5000 (17 064)	35	40	1 330.00
ASHU0771CCHAR	ASHU0753C24CHAR*	700	7500 (25 595)	34	40	1 834.00
ASHU1071CCHAR	ASHU1053C24CHAR*	700	10 000 (34 127)	45	40	1 865.00
---	ASHU1553C24CHAR*	1300	15 000 (51 191)	37	67	2 997.00
---	ASHU2053C24CHAR*	1300	20 000 (68 254)	49	67	3 294.00
---	ASHU2553C24CHAR*	1300	25 000 (85 318)	61	67	3 808.00
---	ASHU3053C24CHAR*	1400	30 000 (102 381)	68	67	3 878.00
---	ASHU4053C24CHAR*	2100	40 000 (136 508)	60	100	5 650.00
---	ASHU5053C24CHAR*	2100	50 000 (170 635)	75	100	5 924.00
---	ASHU6053C24CHAR*	2100	60 000 (204 762)	90	100	6 063.00

* Three-phase unit that can be field-converted to a single phase unit

* Three-phase unit

--- not available

ARUH – OXFORD™

COMMERCIAL AND RESIDENTIAL
UNIT HEATER

3 YEAR
WARRANTY



- INSTANT HEAT
- ADJUSTABLE LOUVERS ALLOW YOU TO DIRECT HEAT
- WALL OR CEILING INSTALLATION
- CLOSED AND PERMANENTLY LUBRICATED MOTOR
- 2 KW TO 5 KW MODELS AVAILABLE

COLOR

- charcoal

FINISH

- epoxy-polyester powdercoat

MANUFACTURING

- 20-gauge steel cabinet
- closed and permanently lubricated motor
- 350 CFM quiet helicoidal fan
- adjustable louvers
- thermal protection with automatic reset

ELEMENT

- nichrome element produces instant heat

CONTROL

(thermostats/relays compatibility: p.44)

- built-in thermostat (included with T series)
- wall thermostat (not included)

INSTALLATION

- wall or ceiling mounted with universal mounting bracket (included)

WARRANTY

- three years

WITHOUT CONTROL		BUILT-IN THERMOSTAT		24 V CONTROL		POWER	HEAT RISE
CODE	PRICE	CODE	PRICE	CODE	PRICE	WATTS (BTU/H)	°F
ARUH2CHAR	530.00	ARUH2TCHAR	621.00	ARUH2C24CHAR	621.00	2000/1500 (6825/5119)	18
ARUH3CHAR	652.00	ARUH3TCHAR	750.00	ARUH3C24CHAR	750.00	3000/2250 (10 238/7679)	27
ARUH4CHAR	662.00	ARUH4TCHAR	750.00	ARUH4C24CHAR	750.00	4000/3000 (13 651/10 238)	36
ARUH5CHAR	673.00	ARUH5TCHAR	750.00	ARUH5C24CHAR	750.00	5000/3750 (17 064/12 798)	45

Voltage: 240/208 Volts, Throw distance: 10 ft, Flow: 350 CFM, Phase: 1 NB, Weight: 20 lb

ASGH – SPIDER™

CEILING FAN HEATER

5


YEAR
WARRANTY

C

UL

US

LISTED

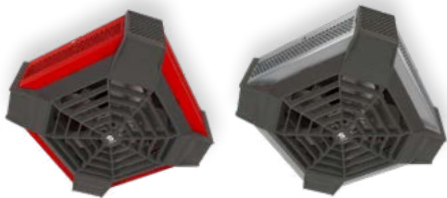

- UNIQUE DESIGN
- SPECIALLY DESIGNED FOR RESIDENTIAL GARAGES
- ENERGY SAVING, COMPATIBLE WITH 4000 W ELECTRONIC THERMOSTATS
- CEILING INSTALLATION FREES UP WALLS AND STORAGE SPACE

COLOR

- red
- luxury finish: stainless steel

FINISH

- polyester powdercoat

MANUFACTURING

- 22-gauge smooth steel housing
- quiet helicoidal fan
- thermal protection with automatic reset
- closed and permanently lubricated motor

ELEMENT

- nichrome element produces instant heat

CONTROL

- (thermostats/relays compatibility: p.44)
- wall thermostat (not included)

INSTALLATION

- ceiling surface mounted with bracket
- from adjacent walls at a minimum of 12 in.
- from floor at a minimum of 8 ft and a maximum of 10 ft

WARRANTY

- five years

PRODUCT	POWER	VOLTAGE	HEAT RISE	COLOR	PRICE
CODE	WATTS (BTU/H)	VOLTS	°F		
ASGH4002R	4000/3000 (13 651/10 238)	240/208	83	RED	640.00
ASGH4002SS	4000/3000 (13 651/10 238)	240/208	83	STAINLESS STEEL	816.00

Weight: 13 lb



ASCH

PORTABLE MULTIPURPOSE HEATER

2 YEAR WARRANTY



- SAFE AND STURDY
- CONVENIENT AND EASY TO TRANSPORT
- COOL TOUCH HOUSING
- ERGONOMIC CARRYING HANDLE FOR EASY CABLE STORAGE
- CAN BE INSTALLED ON THE WALL OR CEILING WITH A MOUNTING BRACKET (SOLD SEPARATELY)

COLOR

- red

FINISH

- epoxy-polyester powdercoat

MANUFACTURING

- 20-gauge steel cabinet
- sturdy handle for portability that also serves as cord rack and which adapts to the mounting bracket
- 6 ft 12 Awg. molded cable with 3-prong grounded
- thermal protection with automatic reset

MOTOR

- 250 CFM fan

ELEMENT

- nichrome element ensuring increased comfort
- cone-shaped to concentrate the air around the element

CONTROL

- built-in thermostat with control knob protector

INSTALLATION

- connects to a standard 30 A 250 V (ASCH48T) or a 20 A 250 V (ASCH40T) grounded receptacle
- mounting bracket (sold separately) that can rotate at 360° while preventing the unit from tipping

WARRANTY

- two years

PRODUCT	POWER	VOLTAGE	CONNECTION	PRICE
CODE	WATTS (BTU/H)	VOLTS		
ASCH40T	4000/3000 (13 651/10 238)	240/208	20 A 250 V PLUG	346.00
ASCH48T	4800/3600 (16 381/12 286)	240/208	30 A 250 V PLUG	383.00

Weight: 13 lb

ACCESSORY

PRODUCT	DESCRIPTION	PRICE
SCH-WBB	Mounting bracket, black	59.00

HGS – GREEN CABLE SURFACE XL™

FLOOR HEATING CABLE

25 YEAR
WARRANTY



- EASY TO INSTALL
- FLEXIBLE AND ROBUST CABLE WITH MINIMAL SHAPE MEMORY
- ADAPTS TO ROOMS OF ALL SHAPES AND SIZES
- MAINTENANCE FREE
- ENERGY SAVINGS: A HEATED MASS RETAINS HEAT MORE EASILY THAN AIR
- CAN BE INSTALLED INDOORS IN DRY OR WET ENVIRONMENTS

MANUFACTURING

- heating elements covered with fluoropolymer insulation for greater reliability
- paired and twisted dual conductor design to eliminate electromagnetic fields
- conductors shielded with a copper braid to ensure safety and robustness
- flexible PVC sheath with constant diameter for easy installation

AVAILABLE VOLTAGES

- 120 V and 240 V

POWERS

Cable gauges

- 3 in.: 14.5 W/ft²
- alternated 3-4 in.: 12.4 W/ft²
- 4 in.: 10.9 W/ft²

Uncoupling membrane

- alternated 2-3 studs
(2-1/2 - 3-3/4 in.): 13.8 W/ft²
- 3 studs (3-3/4 in.): 11.5 W/ft²

CONTROL

- electronic thermostat for floor heating (sold separately)

INSTALLATION

- installs in a few easy steps with an uncoupling membrane or the included patented cable spacers
- compatible with all subfloors that accept thinset mortar or self-leveling underlayment
- compatible with most floor coverings (Validate installation details with the flooring manufacturer)
- can be installed in a wet environment, such as a European style shower floor

WARRANTY

- twenty-five years.



PRODUCT	COVERAGE (FT²)				POWER* (W)	AMPERAGE (A)	LENGTH (FT)	PRICE
	STELPRO MEMBRANE		CABLE GAUGES					
	2 1/2" - 3 3/4" ALTERNATE 2 - 3 STUDS 13.8 W/FT²	3 3/4" 3 STUDS 11.5 W/FT²	3"	4"				
			14.5 W/FT²	10.9 W/FT²				
240/208 VOLTS								
HGS240L0031	9.1	10.8	8.8	11.5	113 / 85	0.5 / 0.4	31	245.00
HGS240L0049	13.9	16.6	13.4	17.6	176 / 132	0.8 / 0.7	49	288.00
HGS240L0063	17.8	21.2	17.1	22.6	228 / 171	1.0 / 0.9	63	288.00
HGS240L0089	24.8	29.6	23.9	31.5	322 / 242	1.4 / 1.2	89	288.00
HGS240L0111	30.8	36.8	29.6	39.1	403 / 303	1.7 / 1.5	111	288.00
HGS240L0134	36.8	44.0	35.4	46.8	484 / 364	2.1 / 1.8	134	288.00
HGS240L0157	43.1	51.5	41.5	54.9	570 / 428	2.4 / 2.1	157	288.00
HGS240L0178	48.6	58.1	46.7	61.9	645 / 484	2.7 / 2.4	178	288.00
HGS240L0200	54.6	65.2	52.5	69.5	725 / 545	3.1 / 2.7	200	288.00
HGS240L0222	60.5	72.3	58.1	77.0	806 / 605	3.4 / 3.0	222	288.00
HGS240L0258	69.9	83.6	67.2	89.1	934 / 702	3.9 / 3.4	258	288.00
HGS240L0291	78.7	94.1	75.6	100.3	1054 / 792	4.4 / 3.9	291	288.00
HGS240L0320	86.4	103.3	83.0	110.1	1159 / 871	4.9 / 4.2	320	288.00
HGS240L0352	95.0	113.6	91.2	121.1	1276 / 958	5.4 / 4.7	352	288.00
HGS240L0390	105.0	125.6	100.9	133.9	1413 / 1062	5.9 / 5.1	390	288.00
HGS240L0418	112.4	134.4	107.9	143.3	1515 / 1138	6.4 / 5.5	418	907.00
HGS240L0480	128.8	154.2	123.7	164.3	1739 / 1306	7.3 / 6.3	480	907.00
HGS240L0503	134.8	161.4	129.5	172.0	1760 / 1322	7.4 / 6.4	503	907.00
HGS240L0553	148.0	177.2	142.2	188.9	2109 / 1584	8.8 / 7.7	553	907.00
HGS240L0632	168.9	202.2	162.2	215.5	2234 / 1678	9.4 / 8.1	632	907.00
HGS240L0712	189.9	227.5	182.4	242.4	2438 / 1831	10.2 / 8.8	712	907.00
HGS240L0772	205.7	246.4	197.6	262.6	2796 / 2100	11.7 / 10.1	772	907.00
HGS240L0908	241.5	289.3	232.0	308.4	3289 / 2470	13.7 / 11.9	908	907.00
120 VOLTS								
HGS120L0024	7.2	8.6	6.9	9.1	88	0.8	24	238.00
HGS120L0031	9.2	10.9	8.9	11.6	114	1.0	31	238.00
HGS120L0045	12.8	15.2	12.3	16.2	161	1.4	45	238.00
HGS120L0067	18.9	22.5	18.1	23.9	242	2.1	67	238.00
HGS120L0079	22.0	26.3	21.2	28.0	285	2.4	79	238.00
HGS120L0100	27.8	33.2	26.8	35.4	363	3.1	100	238.00
HGS120L0111	30.8	36.8	29.6	39.1	403	3.4	111	238.00
HGS120L0129	35.6	42.5	34.2	45.2	467	3.9	129	506.00
HGS120L0160	43.9	52.4	42.2	55.8	579	4.9	160	506.00
HGS120L0176	48.2	57.5	46.3	61.3	638	5.4	176	506.00
HGS120L0195	53.2	63.5	51.1	67.7	707	5.9	195	506.00
HGS120L0209	56.9	68.0	54.7	72.5	758	6.4	209	662.00
HGS120L0240	65.2	78.0	62.7	83.1	870	7.3	240	662.00
HGS120L0252	68.3	81.7	65.6	87.0	879	7.4	252	662.00
HGS120L0276	74.9	89.5	71.9	95.4	1054	8.8	276	790.00
HGS120L0316	85.3	102.1	82.0	108.8	1118	9.4	316	790.00
HGS120L0356	96.0	114.8	92.2	122.3	1218	10.2	356	973.00
HGS120L0386	103.9	124.3	99.8	132.4	1398	11.7	386	1004.00
HGS120L0454	121.8	145.8	117.0	155.4	1645	13.7	454	1092.00

ACCESSORIES

PRODUCT	DESCRIPTION	PRICE
HGSMD162	Uncoupling membrane (roll of 162 ft ²)	739.00
HGSMD054	Uncoupling membrane (roll of 54 ft ²)	739.00
HGSMDF	Uncoupling membrane (sheet of 8.9 ft ²)	739.00
HSGGG	Gauges for heating cable (pack of 20), includes glue stick	30.00
FLS1240	10K Thermal floor sensor - 15 ft wire	38.00
FLG25	Hot Glue Sticks (25 units)	42.00
FSK-03	Repair kit (for 1 splice) - Twin conductor surface cable (GS, HGS, CGS, CPS, TS)	57.00



- **ENERGY EFFICIENT** – AUTOMATICALLY VARIES ITS POWER OUTPUT IN RESPONSE TO TEMPERATURE CHANGES
- **EASY TO INSTALL** – CAN BE CUT TO ANY LENGTH
- **SAFE** – EVEN WHEN OVERLAPPED
- **POWER CONNECTION, SPLICE, TEE AND END SEAL KIT** REDUCES INSTALLATION TIME

MANUFACTURING

- normal cable width 0.42 in.
- normal cable thickness 0.23 in.
- cable bus wire gauge 16 AWG

WATTAGE

- 5 W/ft, 8 W/ft, 10 W/ft

INSTALLATION

- maximum exposure temperature is 185 °F
- Minimum installation temperature -40 °F

WARRANTY

- two years

PRODUCT	VOLTAGE	LENGTH	POWER OUTPUT	PRICE
CODE	VOLTS	FT	WATTS	
SSFR1W05L1000	120	1000	5	12 000.00
SSFR1W08L1000	120	1000	8	12 000.00
SSFR1W05L0500	120	500	5	6 000.00
SSFR1W08L0500	120	500	8	6 000.00
SSFR2W05L1000	240	1000	5	12 000.00
SSFR2W08L1000	240	1000	8	12 000.00
SSFR2W10L1000	240	1000	10	12 000.00
SSFR2W05L0500	240	500	5	6 000.00
SSFR2W08L0500	240	500	8	6 000.00
SSFR2W10L0500	240	500	10	6 000.00

ACCESSORIES

PRODUCT	DESCRIPTION	PRICE
SSFR-ALUTAPE	aluminum adhesive foil tape	130.00
SSFR-FIBTAPE	fiberglass adhesive tape	16.00
SSFR00	power connection kit for SSFR cable	122.00
SSFR03	fiberglass adhesive tape and warning labels	51.00
SSFR08	plug-in power connection with GFCI kit for SSFR cable	160.00
SSFR10	splice and tee kit for SSFR cable	86.00
SSFR12	end seal kit for SSFR cable	50.00
SSFR13	roof clips for SSFP/SSFR cables (Kit of 10)	41.00
SSFR14	roof clips for SSFP/SSFR cables (Kit of 50)	144.00
SSFR15	downspout cable hanger bracket for SSFP/SSFR cables	37.00
SSFR-ENDSEAL	commercial end seal kit for SSFR cable	41.00
SSFR-SPLICE	commercial splice connection kit for SSFR cable	107.00
SSFR-TEE	commercial tee connection kit for SSFR cable	107.00
SSFR-JBOX	commercial junction box for SSFR cable	423.00
FPT130	electronic controller NEMA 4, 30 A @ 100V - 277 V with GFI 30 mA, setpoint selection 30 °F, 38 °F, 45 °F or 50 °F with a 20 ft sensor	2 301.00
TPR-L1N-3X-Q10	thermostat NEMA 4, 22 A resistive @ 125 V/250 V/480 V, fixed setpoint at 40 °F with 3 ft tin plated copper capillary	682.00
TRF115-005	thermostat NEMA 4, 25 A resistive @ 120 V/208 V/240 V/277 V, 0 °F to 120 °F with 5 ft stainless steel capillary	270.00
GFPRO	electronic controller NEMA 4, 30 A @ 100 V - 277 V resistive with GFI 30 mA, 2 sensor inputs for GIT-1 sensor	2 301.00
PDPRO	electronic controller NEMA 4, 30 A @ 100 V - 277 V resistive, 2 sensor inputs for GIT-1 sensor	2 096.00
GIT-1	roof and gutter temperature and moisture sensor for GFPRO and PDPRO, stepoint at 38 °F	1 294.00
DS-8C	controller with aerial temperature and moisture deported 10 ft sensor, 30 A @ 100 - 277 V	1 169.00
DS-9C	controller with aerial temperature and moisture deported 10 ft sensor, 2 circuits of 30 A @ 100 - 277 V	1 402.00





- RESIDENTIAL OR COMMERCIAL USE
- PREASSEMBLED SELF-REGULATING CABLE
- QUICK AND EASY TO CONNECT TO A 120 V OUTLET
- 240V MODELS AVAILABLE – THREE CONNECTION WIRES
- AVAILABLE IN A RANGE OF LENGTHS

MANUFACTURING

- normal cable width 0.42 in.
- normal cable thickness 0.23 in.
- cable bus wire gauge 16 AWG
- cold lead length 6 ft

WATTAGE

- 5 W/ft at 50°F

INSTALLATION

- minimum circuit breaker size is 15 amps
- maximum exposure temperature is 185°F
- electrical classification: nonhazardous

WARRANTY

- two years

PRODUCT	VOLTAGE	LENGTH	COLD LEAD WITH PLUG	POWER OUTPUT ON PIPE			PRICE
CODE	VOLTS	FT	AWG	WATTS @ 50°F	WATTS @ 40°F	WATTS @ 32°F	
SSFP1W05L0006	120	6	18	30	36	60	180.00
SSFP1W05L0012	120	12	18	60	72	120	198.00
SSFP1W05L0018	120	18	18	90	108	180	248.00
SSFP1W05L0024	120	24	18	120	144	240	277.00
SSFP1W05L0036	120	36	18	180	216	360	396.00
SSFP1W05L0050	120	50	16	250	300	500	427.00
SSFP1W05L0075	120	75	16	375	450	750	608.00
SSFP1W05L0100	120	100	16	500	600	1000	801.00
SSFP1W05L0125	120	125	14	625	750	1250	992.00
SSFP1W05L0150	120	150	14	750	900	1500	1 178.00
SSFP2W05L0036	240	36	18	180	216	360	314.00
SSFP2W05L0050	240	50	16	250	300	500	427.00
SSFP2W05L0075	240	75	16	375	450	750	608.00
SSFP2W05L0100	240	100	16	500	600	1000	801.00
SSFP2W05L0125	240	125	14	625	750	1250	992.00
SSFP2W05L0150	240	150	14	750	900	1500	1 178.00



- PREVENT ROOF DAMAGE AND LEAKING
- KEEP GUTTERS AND DOWNSPOUTS FLOWING
- PREASSEMBLED – READY TO INSTALL
- THERMOSTAT WITH TEMPERATURE AND MOISTURE SENSORS (OPTIONAL)

MANUFACTURING

- tough XLPE inner insulation
- continuous ground braid
- weather resistant PVC (high-low temperature) out jacket
- twin conductor
- bending radius of 1 inch
- 6 ft cold lead with plug

WATTAGE

- 5 W/ft

CONTROL

- controller with moisture and ambient temperature sensors (optional)

INSTALLATION

- install at a temperature above 32 °F

WARRANTY

- two years

*Never install on a flat roof. This cable is not designed to remove all the snow from a roof.

PRODUCT	VOLTAGE	LENGTH	POWER	AMPERAGE	PRICE
CODE	VOLTS	FT	WATTS	AMPS	
SCRG1W0150L0030	120	30	150	1.3	79.00
SCRG1W0300L0060	120	60	300	2.5	106.00
SCRG1W0400L0080	120	80	400	3.3	141.00
SCRG1W0500L0100	120	100	500	4.2	173.00
SCRG1W0600L0120	120	120	600	5.0	183.00
SCRG1W0800L0160	120	160	800	6.7	229.00
SCRG1W1000L0200	120	200	1000	8.3	252.00
SCRG1W1200L0240	120	240	1200	10.0	293.00

MUAA

MAKE-UP AIR UNIT

3 YEAR WARRANTY



- THE MOST COMPACT AND LIGHTWEIGHT ON THE MARKET
- MULTIPLE INSTALLATION POSITIONS
- INTEGRATED TEMPERATURE SENSOR – FOR EASY INSTALLATION

FINISH

- 22-gauge galvanized steel cabinet resistant to corrosion

MANUFACTURING

- removable electric elements with automatic thermal protection
- manual thermal protection
- built-in temperature sensor
- spring backdraft damper with gasket
- easily accessible, washable aluminum filter

ELEMENTS

- open, nichrome elements
- modulation of the elements by the SCR technology to maintain a constant temperature using only the required energy

CONTROL

- wall control (MUAA06 120V-1P and 240/208V-1P models)
- terminal strip for exhaust fan (MUAA06 120V-1P and 240/208V-1P models)
- current switch to synchronize with activation of an exhaust fan (other models)

INSTALLATION

- 6 in. to 12 in. round duct
- horizontal air flow for all models
- vertical air upflow or downflow on 6 in. to 10 in. models only
- "zero inch" clearance from flammable materials

WARRANTY

- three years, *five years on elements

PRODUCT	COLLAR DIAMETER	POWER	VOLTAGE	FLOW	WEIGHT
CODE	IN.	KILOWATTS	VOLTS	CFM	LB
MUAA ^{XX} YY ^{YY} ZZ ^{ZZ} (M)	6*	1.5 2.0	120-1P	45 60	15
	6*	1.5 2.0 3.0	240/208-1P	45 60 90	15
	6	1.5 2.0 3.0	208-3P 347-1P 480-3P 600-3P	45 60 90	27
	8	4.5 5.0 6.0	240/208-1P 208-3P 347-1P 480-3P 600-3P	120 160 180	28
	10	7.0 8.0 9.0 10.0 12.0	240/208-1P 208-3P 347-1P 480-3P 600-3P	210 240 270 300 360	42
	12	8.0 10.0 12.0 14.0 16.0 18.0 20.0	240/208-1P 208-3P 347-1P 480-3P 600-3P	240 300 360 420 480 540 600	45

XX: Collar diameter

YY: Power in kilowatt (01 = 1.5 kw et 04 = 4.5 kw)

ZZ: Voltage (11 = 120V-1P | 83 = 208V-3P | 21 = 240/208V-1P | 31 = 347V-1P | 53 = 480V-3P | 63 = 600V-3P)

(M): A motorized feature is available upon request for 6* models.

6*: These models are offered with a neutral terminal (three-wire connection).

Refer to the electrical drawing for more details.

SDHx, SDHxT

CUSTOM DUCT HEATERS

3

YEAR
WARRANTY

UL

US

LISTED



SDHR



SDHI



SDHF

- IMPROVED ELECTRONIC CONTROLS (OPTIONAL)
- ULTRA-PRECISE ELECTRONIC AIR VELOCITY SENSOR (OPTIONAL - P OPTION)

FINISH

- 20 to 16 gauge galvanized steel cabinet resistant to corrosion

MANUFACTURING

- junction box door
- removable electric elements (optional)
- double thermal protections (manual and automatic)
- neoprene gasket (optional)
- Nema 4, Nema 4x and Nema 12 control box (optional)
- stainless steel element housing (optional)

ELEMENTS

- open, nichrome elements
- tubular in Incoloy 800
- modulation of the elements by SCR technology to maintain a constant temperature using only the required energy

CONTROL

- built-in temperature limit sensor (TT option)
- electronic air velocity sensor (P option)
- for more electronic control and card options, see the options and controls table
- control voltage: 0-10 V, 2-10 V (4-20mA), 24Vac (PWM), 24Vdc
- heater interlock included

INSTALLATION

- round duct starting at 4 in. (SDHR model)
- rectangular duct starting at 6 in. x 6 in. (SDHI and SDHF models)
- vertical, horizontal, upflow or downflow position
- "zero inch" clearance from flammable materials

WARRANTY

- three years

PRODUCT	TYPE OF MODEL	POWER	VOLTAGE	PHASE	DUCT DIMENSIONS
CODE		KILOWATTS	VOLTS	NO.	STARTING FROM (IN.)
SDHI AND SDHIT	INSERTION	UP TO 1000	120 TO 600	1 OR 3	6 X 6
SDHF AND SDHFT	FLANGE	UP TO 1000	120 TO 600	1 OR 3	6 X 6
SDHR AND SDHRT	ROUND	UP TO 1000	120 TO 600	1 OR 3	4

UL certification: 25.5 kW/sq.ft for SDHx and 13 kW/sq.ft for SDHxT

ELN – EL-NIÑO™

HAND DRYER

5

YEAR WARRANTY

C

UL

US

LISTED



- NOISE LEVEL AND HEAT CONTROL – FOUR PERSONALIZED MODES
- ENERGY EFFICIENT IN ECONOMICAL AND HARMONY MODES
- HEAVY-DUTY DIE-CAST ALUMINUM ALLOY SHELL
- STYLISH AND COMPACT – LESS THAN 4 INCHES DEEP
- SEMI-RECESSED INSTALLATION – LESS THAN 4 INCHES

COLORS

- standard: white
- luxury finish: brushed chrome (see price list)
- Orora (optional): refer to p.45

FINISH

- epoxy-polyester powdercoat or chrome-plated

MANUFACTURING

- rib reinforced shell, solidly constructed of die-cast aluminum alloy
- lightweight, heavy duty and rustproof shell
- wall bracket with two chrome-plated tamper-proof bolts

ELEMENT

- nichrome element located in motor section

CONTROL

- four personalized operating modes to meet your needs
- infrared optical sensor located next to the air outlet activates and deactivates the hand dryer
- 60-second lockout feature is activated if hands are not removed before this time

INSTALLATION


- surface mounted
- optional semi-recessed installation with depth of 4 inches or less; meets ADA standards (*Americans with Disabilities Act*)

WARRANTY

- five years, *three years on electronic components

PRODUCT CODE	POWER (WATTS)†			VOLTAGE VOLTS	AMPERAGE AMPERES	WEIGHT LB	PRICE	
	ELEMENT	MOTOR	TOTAL				W	BC
ELNV0901A	900	550	1450	120	12	9.8	1 428.00	1 553.00
ELNV0902A	900	550	1450	240	6	9.8	1 428.00	1 553.00
ELNV0908A	900	550	1450	208	7	9.8	1 428.00	1 553.00

Add W for white or BC for brushed chrome (consult the optional colors chart or contact your Stelpro representative for all other colors). † Data obtained in Normal/High mode

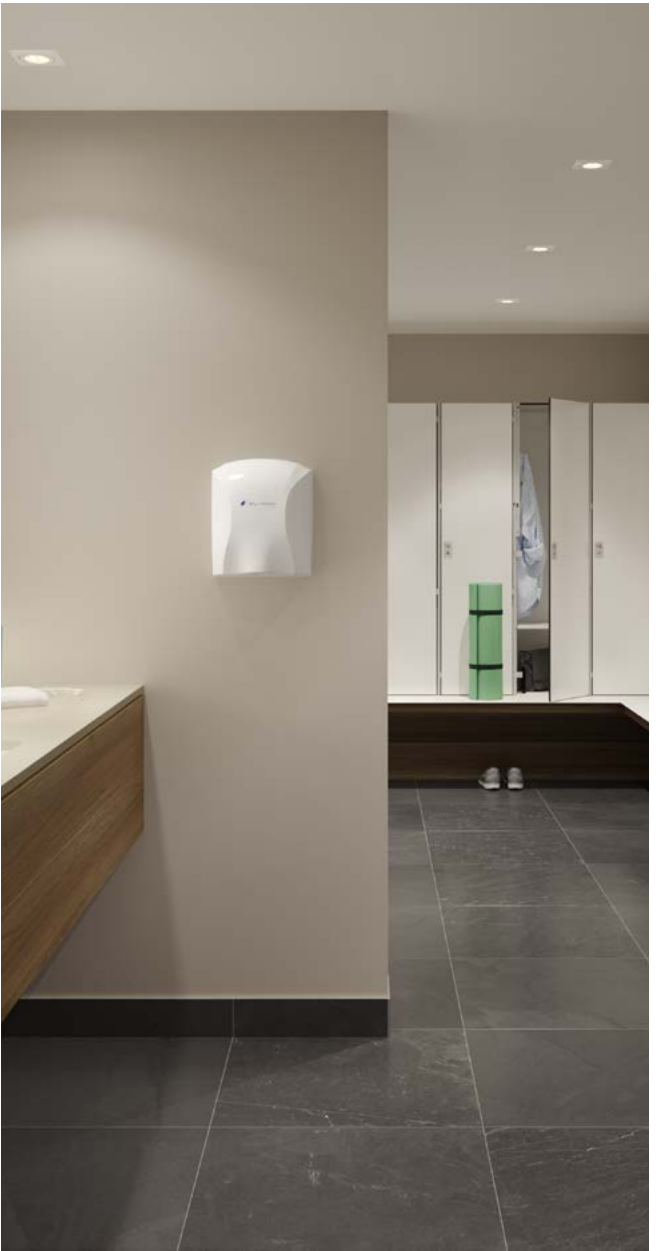

ST302P, ST402P

PROGRAMMABLE ELECTRONIC THERMOSTATS FOR BASEBOARDS AND CONVECTORS

5 YEAR
WARRANTY



3000 W
4000 W



- ENERGY SAVINGS UP TO 20%*
- SIMPLE THREE-STEP PROGRAMMING
- UNBEATABLE ACCURACY
- SAFE DESIGN – SEALED HOUSING
- S³ MOUNTING PLATE

COLOR

- white

FINISH

- molded plastic

CONTROL

- two-wire connection
- possibility of four events on weekdays and two events on weekends
- protection against power failure (two hours)
- display in Celsius or Fahrenheit

ACCURACY

- accurate ambient temperature control of $\pm 1^{\circ}\text{F}$
- CSA C828-13
- temperature sensing with thermistor

TEMPERATURE RANGE

- 41°F to 86°F

WARRANTY

- five years

* independent study

PRODUCT	WATTS		VOLTAGE	MAX. AMPERAGE	FREQUENCY	PRICE
CODE	MINIMUM	MAXIMUM	VOLTS	AMPERES	HZ	
ST302P	150/260/300	1500/2600/3000	120/208/240	12.5	60	100.00
ST402P	150/260/300	2000/3475/4000	120/208/240	16.7	60	111.00

Dimensions ST302P: 4.35 in. wide, 4.94 in. high and 1.38 in. deep
Dimensions ST402P: 4.94 in. wide, 4.94 in. high and 1.38 in. deep

ST252NP, ST302NP, ST402NP

NON-PROGRAMMABLE ELECTRONIC THERMOSTATS FOR BASEBOARDS AND CONVECTORS

PRODUCT	WATTS		VOLTAGE	MAX. AMPERAGE	FREQUENCY	PRICE
CODE	MINIMUM	MAXIMUM	VOLTS	AMPERES	HZ	
ST252NP	150/260/300	1250/2160/2500	120/208/240	10.4	60	69.00
ST302NP	150/260/300	1500/2600/3000	120/208/240	12.5	60	75.00
ST402NP	150/260/300	2000/3475/4000	120/208/240	16.7	60	85.00

Dimensions ST252NP - ST302NP: 4.35 in. wide, 4.94 in. high and 1.38 in. deep
Dimensions ST402NP: 4.94 in. wide, 4.94 in. high and 1.38 in. deep

ST402PFF

PROGRAMMABLE ELECTRONIC THERMOSTAT FOR FAN HEATERS

5 YEAR WARRANTY



4000 W



- ENERGY SAVINGS UP TO 20%*
- SIMPLE THREE-STEP PROGRAMMING
- HEAT "BOOST" FEATURE AND "LOBBY" MODE
- SAFE DESIGN – SEALED HOUSING
- S³ MOUNTING PLATE

COLOR

- white

FINITION

- molded plastic

CONTROL

- three-wire connection
- fast and easy start of the heat "boost" function
- possibility of four events on weekdays and two events on weekends
- protection against power failure (two hours)
- display in Celsius or Fahrenheit

ACCURACY

- accurate ambient temperature control of $\pm 1^{\circ}\text{F}$
- CSA C828-13
- temperature sensing with thermistor

TEMPERATURE RANGE

- 41°F to 86°F

WARRANTY

- five years

* independent study

PRODUCT	WATTS		VOLTAGE	MAX. AMPERAGE	FREQUENCY	PRICE
CODE	MINIMUM	MAXIMUM	VOLTS	AMPERES	HZ	
ST402PFF	150/260/300	2000/3475/4000	120/208/240	16.7	60	111.00

Dimensions ST402PFF : 4.94 in. wide, 4.94 in. high and 1.38 in. deep

ST252NPFF, ST402NPFF

NON-PROGRAMMABLE ELECTRONIC THERMOSTAT FOR FAN HEATERS

PRODUCT	WATTS		TENSION	MAX. AMPERAGE	FREQUENCY	PRICE
CODE	MINIMUM	MAXIMUM	VOLTS	AMPERES	HZ	
ST252NPFF	150/260/300	1250/2160/2500	120/208/240	10.4	60	69.00
ST402NPFF	150/260/300	2000/3475/4000	120/208/240	16.7	60	85.00

Dimensions ST252NPFF: 4.35 in. wide, 4.94 in. high and 1.38 in. deep

Dimensions ST402NPFF : 4.94 in. wide, 4.94 in. high and 1.38 in. deep

STZW402 – KI™ Z-WAVE

ELECTRONIC THERMOSTAT
FOR SMART HOME

3 YEAR
WARRANTY



4000 W



- INTEGRATES EASILY WITH A SMART HOME HUB
- CONTROL WITH A MOBILE APPLICATION DEPENDING ON THE HUB
- ENERGY SAVINGS OF 10-15% DEPENDING ON USE*

COMPATIBILITY

- Z-Wave hub required
- Z-Wave Plus certified

COLOR

- white

FINISH

- molded plastic

WATTAGE AND VOLTAGE

- 150 W to 2000 W @ 120 V
- 300 W to 4000 W @ 240 V

CONTROL

- two functions available: comfort and economy
- two- or four-wire connection
- outdoor temperature display†
- frost-free warning
- display in Celsius or Fahrenheit
- backlit screen with adjustable intensity

ACCURACY

- accurate ambient temperature control of $\pm 1^{\circ}\text{F}$
- CSA C828-13
- temperature sensing with thermistor

TEMPERATURE RANGE

- 41°F to 86°F

WARRANTY

- three years

* independent study

† depending on the central controller and its application

PRODUCT	WATTS		VOLTAGE	AMPERAGE	FREQUENCY	PRICE
CODE	MINIMUM	MAXIMUM	VOLTS	AMPERES	HZ	
STZW402WB+	150/300	2000/4000	120/240	16.7	50/60	212.00

Dimensions: 4 7/8 in. wide, 4 7/8 in. high and 1 3/8 in. deep

COMPATIBLE WITH



WORKS WITH
SmartThings

for home automated system compatibilities and instructions on connecting to your KI thermostat, visit www.stelpro.com

STF362WF – CONCERTO WI-FI

FLOOR HEATING THERMOSTAT
– CONNECTED – WI-FI

3 YEAR
WARRANTY



3600 W



NEW

- CONTROL FROM ANYWHERE, AT ANY TIME
- SIMPLE CONFIGURATION VIA APP USING BLUETOOTH®
- CHOICE OF FLOOR OR AMBIENT TEMPERATURE CONTROL

COLOR

- white

FINISH

- molded plastic

MANUFACTURING

- fitted with an integrated ground fault circuit interrupter (GFCI) and a test indicator light.
- terminal block connection / DPST with 2-pole disconnects
- floor sensor (15 ft) included*

POWER AND VOLTAGE

- maximum of 1800 W @ 120 V
- maximum of 3120 W @ 208 V
- maximum of 3600 W @ 240 V

CONTROL

- pre-programmed with four weekday events and two weekend events
- option to control Floor temperature (F), Room temperature (R) or Room with Floor limit (RF)

- possibility of setting a maximum temperature setpoint (to protect the floor and users)
- temperature can be displayed in degrees Fahrenheit or Celsius

PRECISION

- precise control of floor or ambient air temperature
- temperature reading with thermistor

TEMPERATURE RANGE

- floor: 41 °F to 104 °F
- ambient: 32 °F to 104 °F

WARRANTY

- three years

*This thermostat is also compatible with floor sensors produced by other manufacturers.

PRODUCT	WATTS	VOLTAGE	AMPERAGE	FREQUENCY	GFCI	PRICE
CODE	MAX.	VOLTS	AMPERES	HZ	MA	
STF362WF	1800/3120/3600	120/208/240	15	50/60	5	486.00

COMPATIBLE WITH

Compatible with
Amazon Alexa



STF362PTS – CONCERTO TOUCH

FLOOR HEATING THERMOSTAT
– TOUCH SCREEN

3 YEAR
WARRANTY



3600 W



NEW

- LARGE 3.5-INCH COLOR TOUCHSCREEN
- BUILT-IN INSTALLATION WIZARD
- EASY 7-DAY PROGRAMMING

COLOR

- white

FINISH

- molded plastic

MANUFACTURING

- fitted with an integrated ground fault circuit interrupter (GFCI) and a test indicator light.
- terminal block connection / DPST with 2-pole disconnects
- floor sensor (15 ft) included*

POWER AND VOLTAGE

- maximum of 1800 W @ 120 V
- maximum of 3120 W @ 208 V
- maximum of 3600 W @ 240 V

CONTROL

- pre-programmed with four weekday events and two weekend events
- option of controlling Floor temperature (F), Room temperature (R), Room with Floor limit (RF) or in Controller mode (without temperature reading)

- possibility of setting a maximum temperature setpoint (to protect the floor and users)
- adaptive function (Early start) – allows heating to reach the setpoint as soon as the program starts
- temperature can be displayed in degrees Fahrenheit or Celsius

PRECISION

- precise control of floor or ambient air temperature
- temperature reading with thermistor

TEMPERATURE RANGE

- floor: 41 °F to 104 °F
- ambient: 32 °F to 104 °F

WARRANTY

- three years

*This thermostat is also compatible with floor sensors produced by other manufacturers.

PRODUCT	WATTS	VOLTAGE	AMPERAGE	FREQUENCY	GFCI	PRICE
CODE	MAX.	VOLTS	AMPERES	HZ	MA	
STF362PTS	1800/3120/3600	120/208/240	15	50/60	5	448.00

STF362P – CONCERTO PROGRAMMABLE

FLOOR HEATING THERMOSTAT – PROGRAMMABLE

NEW

PRODUCT	WATTS	VOLTAGE	AMPERAGE	FREQUENCY	GFCI	PRICE
CODE	MAX.	VOLTS	AMPERES	HZ	MA	
STF362P	1800/3120/3600	120/208/240	15	50/60	5	328.00

STF362P – CONCERTO BASIC

FLOOR HEATING THERMOSTAT
– NON-PROGRAMMABLE

3 YEAR WARRANTY



NEW

3600 W



- QUICK AND EASY MANUAL CONTROL
- PRECISE, CONSTANT TEMPERATURE FOR COMFORT AT ALL TIMES
- ENERGY MONITORING FOR LAST SEVEN DAYS

COLOR

- white

FINISH

- molded plastic

MANUFACTURING

- fitted with an integrated ground fault circuit interrupter (GFCI) and a test indicator light.
- terminal block connection / DPST with 2-pole disconnects
- floor sensor (15 ft) included*

POWER AND VOLTAGE

- maximum of 1800 W @ 120 V
- maximum of 3120 W @ 208 V
- maximum of 3600 W @ 240 V

CONTROL

- pre-programmed with four weekday events and two weekend events
- option of controlling Floor temperature (F), Room temperature (R), Room with Floor limit (RF) or in Controller mode (without temperature reading)

- possibility of setting a maximum temperature setpoint (to protect the floor and users)
- adaptive function (Early start) – allows heating to reach the setpoint as soon as the program starts
- temperature can be displayed in degrees Fahrenheit or Celsius

PRECISION

- precise control of floor or ambient air temperature
- temperature reading with thermistor

TEMPERATURE RANGE

- floor: 41 °F to 104 °F
- ambient: 32 °F to 104 °F

WARRANTY

- three years

*This thermostat is also compatible with floor sensors produced by other manufacturers.

PRODUCT	WATTS	VOLTAGE	AMPERAGE	FREQUENCY	GFCI	PRICE
CODE	MAX.	VOLTS	AMPERES	HZ	MA	
STF362NP	1800/3120/3600	120/208/240	15	50/60	5	283.00

COMPATIBILITY OF THERMOSTATS AND RELAYS

MODEL	ASAT402ZB	STZW402	ST252NP	ST252NPFF	ST302NP, ST302P	ST402NP, ST402P	ST402NPFF, ST402PFF	STE403NP	STE302R2+	STF362NP, STF362P, STF362PTS, STF362WF	STE241 A/RELAIS RE, RM347C OR R841D1036	ET180A/RELAIS* RE, RM347T, RM240T, R841 OR CIRCUIT C24	TH115AF, A/RELAIS CT230GA	SWT1F, SWT2F	OTHER
AB	X	X	X		X	X		X	X		X	X		X	
ABA	X	X	X		X	X		X	X		X	X		X	
AMIR	X	X	X		X	X		X	X		X				
ARUH	X			X			X	X	X		X	X		X	
ARWF	X			X			X	X	X		X	X		X	
SCPT															X
SCR	X	X	X		X	X		X	X		X	X		X	
SCRG															X
HGS										X			X		
ASGH	X						X	X	X		X	X		X	
ASHU	X		X		X	X			X		X	X		X	
ASIRH															SIRHC402-1
ASK	X	X		X			X	X	X		X	X		X	
ASKS	X			X			X	X	X		X	X		X	
ASOA	X			X			X	X	X						
ASSO/S/H	X			X			X	X	X		X	X		X	
ASOR	X	X	X		X	X		X			X				
ASORB	X			X			X	X	X						
ASPR	X	X	X		X	X		X	X		X	X		X	
SSFP															X
SSFR															X
AWF	X			X			X	X	X		X	X		X	

The suggested thermostats may not be compatible with certain voltages, powers and control circuits. Consult the thermostat's user's guide for more information on compatibility.

* For SHU, VUH, CBH and SDC models, please consult customer service for the exceptions.

LET YOURSELF BE INSPIRED

From timeless classics to the latest trends, whether you want to create a relaxing or vibrant environment, Stelpro offers the largest color assortment on the market. Let your imagination run wild!

STANDARD COLORS



SPECIAL FINISH***



ORORA



15% surcharge on list price [25% for Brava (AB) and Prima (ASPR) baseboards]

CUSTOM COLORS*

YOUR HEART IS SET ON ANOTHER COLOR? WE CAN REPLICATE ANY COLOR!

* Certain models are offered standard in these colors (ex. ASHU Series). In such cases the color premium and set up charge do not apply.

** Certain models are offered standard in these colors (ex. ASGH and ASCH Series). In such cases the color premium and set up charge do not apply.

***Availability and price depending on models.

†Contact your Stelpro representative for pricing.

Stelpro reserves the right to modify description, manufacturing specifications or prices without prior notice. The premium applies to all painted units, no matter if there are different models of units or different colors. The set up charges are applicable for each Orora or custom color ordered. For further details on custom colors, whether chart or off-chart, contact your sales representative or customer service. These colors are only reproduced for information purposes. They may differ from the real colors. Some of them are metallic and cannot be accurately reproduced in print. **Returns are not accepted for orders of products with optional colors.** For all the latest models and updated prices, please refer to our website at www.stelpro.com.

SERIES COMPARISON CHART

DESCRIPTION	STELPRO	BERKO	Q-MARK	TP1/MARKEL	KING	CADET	DIMPLEX
High-End Aluminium Baseboard	ABA	CBD	CBD	----	----	----	----
High-End Baseboard	ASPR	----	----	----	----	----	LC
Baseboard	AB	2500	2500	2500	K	F	DPEG
Electronic Convector	AMIR	----	----	----	----	----	----
Bathroom Fan Heater	ASOA	----	----	----	----	----	PCH
Wall Fan Heater	ASSOS	----	----	----	PX ECO2S	CE	----
Wall Fan Heater	AS SO	CZ	CZ	----	W	CS/CB	----
Wall Fan Heater	ASSOH	GFR	GFR	4800	WHF	RM	----
Res Wall Fan Heater	ARWF	SRA/SED	CWH/SED	4300/3200/HF	WHF/W	----	----
Cove Heater	SCR	RCC	RCC	CV/CVX	KCV	----	----
Kick Space Heater	ASKS	QTS	QTS	TSH	KT	UC	CKH
Ceiling Fan Heater	ASK	QCH	QCH	3000	WHFC	----	----
Ceiling Fan Heater	ASGH	----	----	----	----	----	----
Multipurpose Portable Heater	ASCH	BRH	BRH	ICH/5800	PGH	CGWH	DCH/EMC
Wall Fan Heater	AWF	VFK/FRA	CWH/LFK	3310/3320	EFW/LPW	NLW	RFI
Commercial & Residential Unit Heater	ARUH	HUH524TA	MWUH5004	HF5605T	EKB	----	CUH05B31T
Commercial & Industrial Unit Heater	ASHU	HUH/HUHAA	IUH/MUH	5100	KB	----	EUH
Infrared Radiant Heater	ASIRH	VRP/VRS	FRP/FRS	TH/THSS	TW	----	----
Roof And Gutter De-Icing Heating Cable (CW)	SCRG	----	----	----	CWR	----	----
Freeze Protection Preassembled Cable (SR)	SSFP	----	----	----	SRP	----	----
Freeze Protection Cable Reel (SR)	SSFR	----	----	----	SR	----	----

Note: Cross reference from one manufacturer to another is approximate as all manufacturers have different components, design characteristics, etc.
SR = Self-Regulating CW = Constant Wattage

STELPRO.COM
1-844-STELPRO

1041 PARENT ST.
SAINT-BRUNO-DE-MONTARVILLE, QC
J3V 6L7 CANADA



Platinum
member

